



NICO 3

SWING ARMS WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Low Voltage swing-arm luminaire with handcrafted glass shade. Employs a Class 2 electronic low-voltage transformer and integrated full-range rotary dimmer.

LAMPING

50W Low pressure 12V halogen GY6.35 Bi-Pin lamp, included. Suitable for use in an open fixture.

DIFFUSER

Shade shall be handcrafted glass of various decors. Diameter of 5.0" and height of 2.875"

CONSTRUCTION

Fixture utilizes solid brass construction, with decorative metal finish.

1WW: Arm rotates 130° and raises/lowers. Lamp holder pivots. Two parallel 8mm arced tubes raise and lower on canopy pivot.

METAL FINISH

Fixture shall be finished in either Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box.

CORD & PLUG KIT

See next page for optional cord and plug kit that allows the swing-arm to plug into a standard 120V receptacle.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only).



NICO 3 SWING ARM SHOWN IN "WW" STONE SILVER FOIL (1WW-5145SFSN) & "WW" STONE COPPER FOIL (1WW-5145CF-BR) IN BRONZE FINISH

514500
CLEAR STONE

5145GF
STONE GOLD FOIL

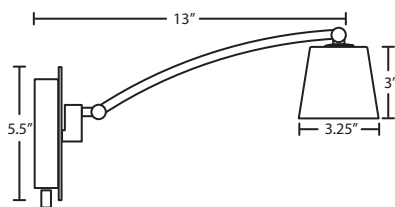

ORDERING:

FIXTURE	-	GLASS OPTIONS	-	METAL FINISH	-	OPTIONS
1WW Swing arm		514500 Clear Stone		BR Bronze		CP Cord & Plug
		5145CF Stone Copper Foil		SN Satin Nickel		
		5145GF Stone Gold Foil				
		5145SF Stone Silver Foil				

Ex. 1WW-514500-SN

Nico 3 Swing Arm Fixture w/ Clear Stone Glass, Satin Nickel Finish

CORD/PLUG KIT ORDERING:


ORDER COMPLETE WITH FIXTURE OR SEPERATELY

When no junction box is available, the T120 kit allows the Swing-arm luminaire to be converted to a fully UL Listed "fixed portable" which plugs into a standard 120V receptacle. Includes 18" wire cover and 6' of cord.

Location: DRY or DAMP, interior only

T120-SN Satin Nickel

T120-BR Bronze

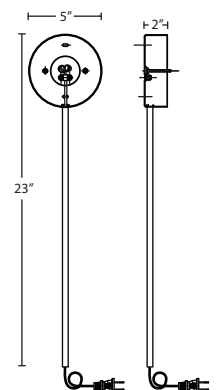

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14