


BRECKENFIELD™

FP7951 ** Ceiling Fan

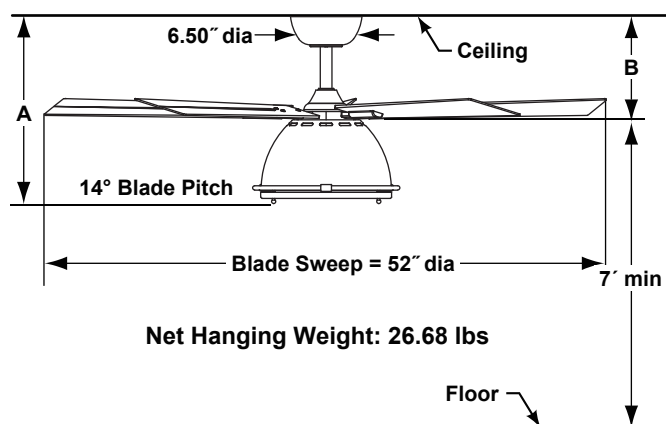

	A	B
Fan w/6\" downrod	16.99\"	9.30\"
Fan w/12\" downrod	22.99\"	15.30\"
Fan w/18\" downrod	28.99\"	21.30\"
Fan w/24\" downrod	34.99\"	27.30\"
Fan w/36\" downrod	46.99\"	39.30\"
Fan w/48\" downrod	58.99\"	51.30\"
Fan w/60\" downrod	70.99\"	63.30\"
Fan w/72\" downrod	82.99\"	75.30\"

Available Finishes

Fan / Housing Assembly		Blade
SN	Satin Nickel	Cherry
OB	Oil-rubbed Bronze	Walnut

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 22\" reversible composite blades is included. Optional CY/WA blade accessory available—sold separately.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 and C25 wall controls, CRL4WH and CRL8TS hand-held remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One bulb (100-watt halogen minican bulb -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:

Fan comes with a 1\" dia. x 6\" long downrod (DR1-6). Optional downrods are available in 12\", 18\", 24\", 36\", 48\", 60\" and 72\" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6\" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	166	6006	91	0.55	66
Med	106	3725	128	0.44	29
Low	45	1618	180	0.26	9