


**BREWMASTER®**

**FP10/20-220 – Pulley Unit**  
**FP1280-220 – Motor**

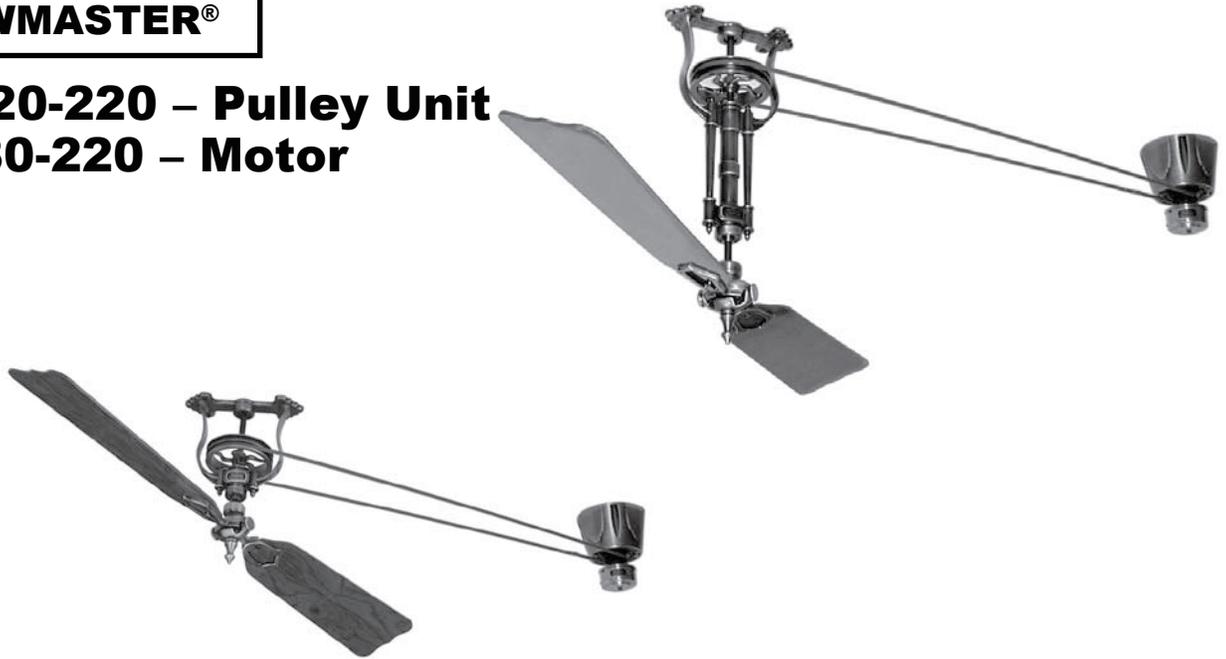

**INSTALLATION REQUIREMENTS:**

It is recommended that each fan and motor assembly have 3/4" plywood backing secured to a structural member for adequate support. Each fan assembly consists of 1 motor and 1 pulley/blade assembly. Motor unit can operate a maximum of 4 pulley/blade assemblies—will result in reduced rpm. Not recommended for sound-sensitive areas. Call technical support for more information.

**ELECTRICAL REQUIREMENTS:**

220~240 VAC, 50 Hz, 5 amp circuit, 5 amp electrical feed, centered under motor unit.

**MOTOR SPECS:**

FK2100-220 motor is designed for optimal performance with this fan.

**BLADES:**

Blade sets consist of 2 blades—sold separately. Blades are available in reversible oak/walnut, cherrywood, rosewood, natural palm and woven bamboo. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for additional information on these blade options.

*Note: Fan speeds will vary according to blade set—material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.*

**CONTROL OPTIONS:**

CW1280-220 wall control is included. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Optional lighting fitters and light kits are available. To be mounted on motor switch cap housing only. Installation instructions are provided with each lighting fitter and light kit. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

**LOCATION USE:**

Fan is rated for dry locations only. Damp location rated with use of black finish fan components and BMD4A blade set.