


CARUSO™

FP7000** Ceiling Fan

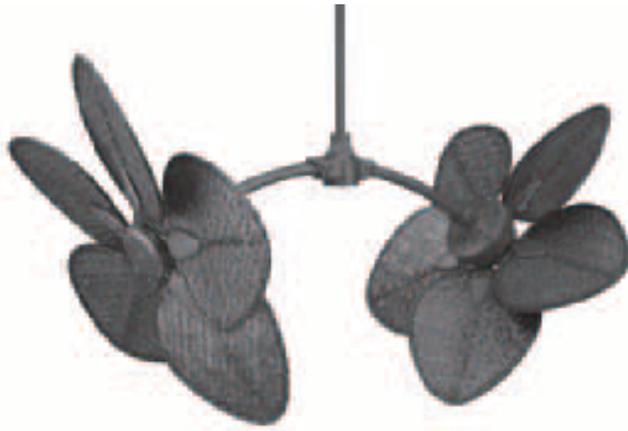

Available Finishes	
AB	Antique brass
OB	Oil-rubbed bronze (Damp)
PW	Pewter

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	127	8293	57	1.22	146
Low	95	6335	70	0.96	90.8

INSTALLATION REQUIREMENTS:

Fan must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 100 lbs. A $\frac{3}{8}$ " x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

Powerful twin 188 x 25 motors are designed for optimal performance with this fan.

FAN SPEEDS:

2-speed reversible (located on switch cup).

DESIGN FEATURES:

Adjustable motor heads with five angles of blade tilt; Vertical, 15°, 30°, 45°, and 60° from vertical.

BLADES:

A variety of palm, bamboo, and all-weather composite blades are available—sold separately. See chart on page 28, or our catalog or www.fanimation.com for blade options.

CONTROL OPTIONS:

CW3WH-CA 2-speed wall control is included. Optional TR24 hand-held remote control is available with the use of optional SW70 switch cap receiver— sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 24" (DR1-24)

A downrod coupler is available for installations requiring a downrod longer than 72". Shorter downrods may be used with various motor angles and blade length combinations (see chart). Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°.

LOCATION USE:

Fan is rated for dry location usage. Damp location rated with use of oil-rubbed bronze finish and woven bamboo or all-weather composite blades (page 28).