


Drawing 1 - Fixture Assembly

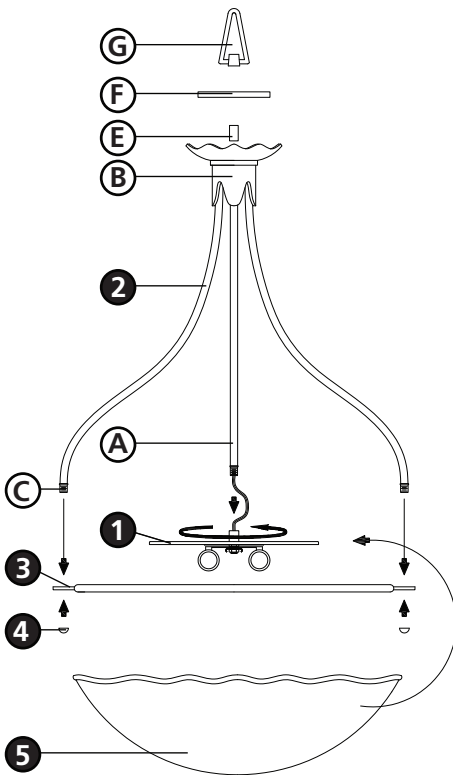

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. Thread cluster assembly (1) onto the end of the center stem (A) and tighten - see **Drawing 1**.
2. Slip spacer (E) along wire and slip over center stem (A) followed by cap (F). Thread loop (G) onto end of nipple. **DO NOT** tighten at this time.
3. Take center column assembly (B) and spread the uprights (2) until they are equally spaced 120 degrees apart.
4. Line up the tabs on ring (3) with the uprights (2).
5. Slip the end (C) of one of the uprights (2) into one of the holes in the ring tabs (3).
6. Thread on cap nuts (4) and hand tighten only.
7. Repeat for the remaining 2 uprights. When complete tighten loop (G).
8. Please refer to the hanging instruction sheet (I.S. 19) to hang fixture. Then refer back to this sheet to continue installation of this fixture.

3

1. Remove two of the cap nuts (4) that hold the ring to the fixture. This will leave the ring (3) attached at only one point - see **Drawing 1**.
2. Tilt ring (3) down slightly.
3. Slip glass (5) into ring (3).
4. Raise ring (3) up and re-attach it to the uprights (2) using cap nuts (4).
5. Glass (5) is now secure. If glass is tilted it can be repositioned at this time.
6. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4282 fixture is 75 watts per bulb.

2.7.08