



Compact Fluorescent
Trim

8" Pro-Optic™ Baffle
2 Horizontal Quad Tube Lamp
Non-IC

Recessed

Type _____

-28 -31
P8131

Finish

Catalog

Dimensions (Inches)

No.	Finish		A	B	C
	White	Black			
P8131	-28	-31	9	7-3/4	6



Maximum Ceiling Thickness = 1-1/4"

Ceiling Opening = 8-1/4"
(See guide for retrofit)

P183H, P188H, P186H

HOUSING COMPATIBILITY GUIDE		
ORDERING GUIDELINES	8 INCH OPENING RANGE	
	MIN	MAX
REQUIRES SD HOUSING OPTION	7-15/16	8-1/8
ALL STANDARD HOUSINGS	8-1/8	8-3/4
ONLY P8130 SERIES TRIMS AVAILABLE: 'WF' OPTION.	8-3/4	9-1/8

Dimensions shown are for the diameter of the frame flange at its narrowest point

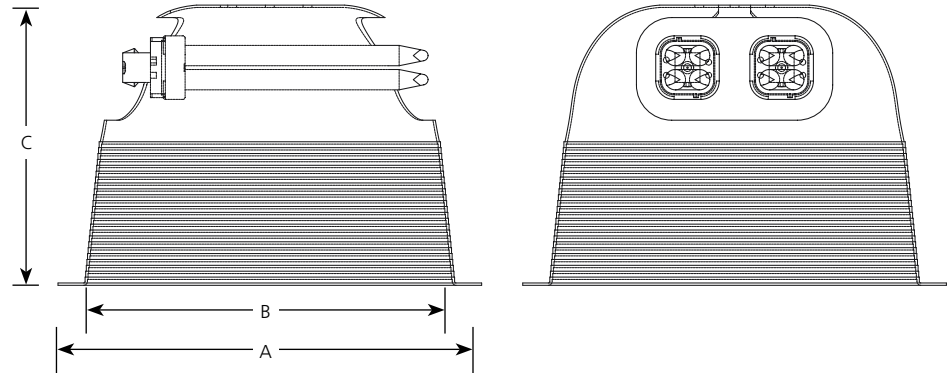

Lamp Wattage

Housing

New Construction	Retrofit	IC	Non-IC
P8213-EB	P183H-EB	N/A	2-13w Quad tube
P8218-EB	P188H-DVEB	N/A	2-18w Quad tube
P8226-EB	P186H-DVEB	N/A	2-26w Quad tube
P8226-DM	P186H-DM	N/A	2-26w Quad tube

Specifications:

Flange

- White painted metal flange

Reflector

- All aluminum construction
- One piece construction with integral white painted flange
- No light leaks around trim flange
- Socket box mounts to reflector for optimum performance and consistent lamp position
- Reflector retention accomplished by spring clips located in aperture of housing

- Spun aluminum multigroove step baffle
- White (-28) or Black (-31) painted baffle and anodized specular clear upper
- Single reflector accommodates both standard and internal emergency housings

Labeling

- cCSAus listed for damp location
- Non-IC rated

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com