


Type _____

P817-AT

| Catalog No. | Lamping | Dimensions (Inches) | | |
|-------------|--------------|-----------------------|--------|-------|
| | | A | B | C |
| P817-AT | 12V 50w MR16 | 9-3/4 | 15-3/4 | 7-1/2 |
| | | Ceiling Opening 4-1/2 | | |

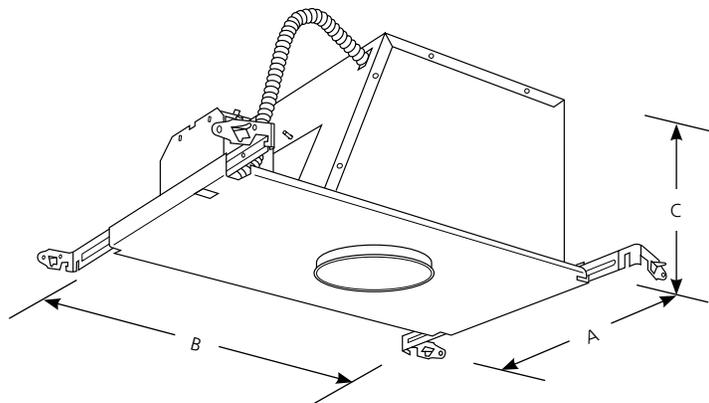

Specifications:

Wiring

- Universal junction box with snap-out sides
- Removable housing for field inspection of wiring
- Grounding pigtail
- Knockout free Romex clamps
- Dimmable using most standard incandescent and low voltage dimmers
- 1/2" & 3/4" Knock outs for rigid or BX fittings

Construction

- Notched housing for chalkline alignment
- Overspray protection
- Full wrap-around plaster frame
- Integral 12-volt electronic transformer
- Housing adjusts from 1/2" to 2-1/2" thick ceilings

Bar Hangers

- Integral nailers for wood joist construction
- Integral T-bar mounting clamps
- Span 24" T-bar spacing
- Lock to secure housing
- Captive

Labeling

- IC and Non-IC rated
- Complies with Washing State Energy Code (WSEC) requirement for air tight
- UL-CUL listed for damp location and through branch wiring

Lamp/Trim

- Lamp mounts to assembly on trim for optimum performance and consistent lamp position





Incandescent-Halogen

4" Low Voltage Firebox®
1-hour fire resistant
Non-IC

Recessed

Type _____
P817-FB

| Catalog No. | Lamping | Dimensions (Inches) | | |
|-------------|--------------|---------------------|--------|--------------------------------|
| | | A | B | C |
| P817-FB | 12V 50w MR16 | 9-9/16 | 13-1/4 | 9-1/8 Ceiling Opening 4-1/2 |

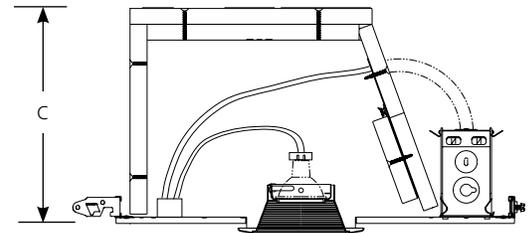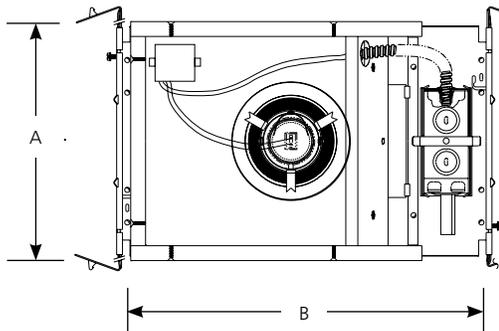

Specifications:

Wiring

- Universal junction box with snap-out sides
- Removable housing for field inspection of wiring
- Grounding pigtail
- Knockout free Romex clamps
- 1/2" & 3/4" Knock outs for rigid or BX fittings
- Dimmable using most standard incandescent and low voltage dimmers

Construction

- Notched housing for chalkline alignment
- Overspray protection
- Full wrap-around plaster frame
- Integral 12-volt electronic transformer
- Housing adjusts from 1/2" to 2-1/2" thick ceilings

Bar Hangers

- Integral nailers for wood joist construction

- Integral T-bar mounting clamps
- Span 24" T-bar spacing
- Lock to secure housing
- Captive

Labeling

- Non-IC rated
- UL-CUL listed for damp location and through branch wiring
- UL Classified to maintain fire ratings of 1 hour or less for all UL P500 series fire rated ceiling/floor assemblies
- UL Classified to maintain fire ratings of 2 hours or less in all UL D200, G200, L200, D500, G500 and L500 series fire rated ceiling assemblies

Lamp/Trim

- Lamp mounts to assembly on trim for optimum performance and consistent lamp position

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

