
## **BREWMASTER®**

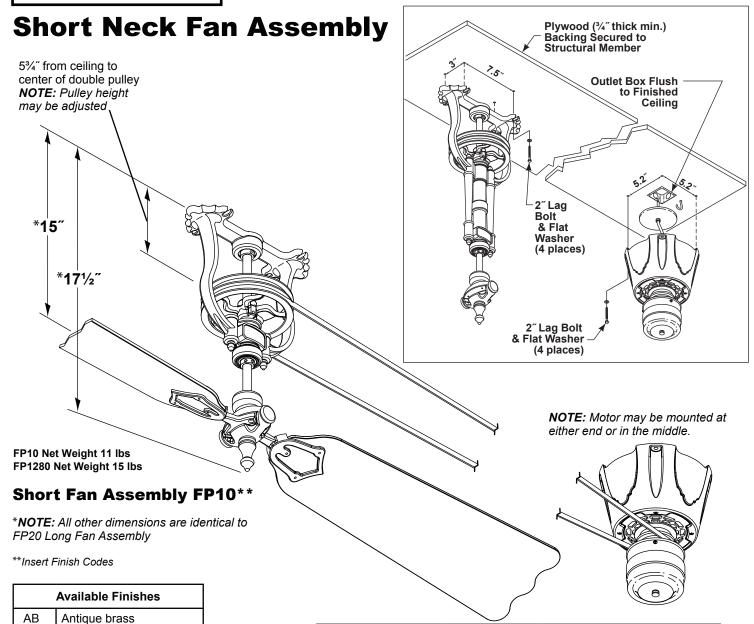

| Motor  | Unit with I | ong Neck    | <b>Fan Assembly</b> |
|--------|-------------|-------------|---------------------|
| 111000 | O           | .0.19 .1001 |                     |

BL

PW

Black

Pewter

|                  | Fan Speed (RPM) |        |     |  |  |
|------------------|-----------------|--------|-----|--|--|
|                  | High            | Medium | Low |  |  |
| One-<br>FP10**   | 125             | 100    | 80  |  |  |
| Two-<br>FP10**   | 105             | 70     | 50  |  |  |
| Three-<br>FP10** | 90              | 50     | 35  |  |  |
| Four-<br>FP10**  | 80              | 40     | 28  |  |  |

**NOTE:** The RPM's are approximate and may vary by fan and application.

| Ordering Information (Items Sold Separately) |             |  |  |  |  |
|--|-------------|--|--|--|--|
| Item   | Catalog No. | Description  |  |  |  |
| Short Fan<br>Assembly                        | FP10**      | 1-short pulley assembly<br>30 ft. of 3/8" belt<br>2-traditional blade holders<br>2-wood blade holders<br>4-hardware bags |  |  |  |
| One Motor Unit                               | FP1280**    | Three-speed, reversible 1-splice/hardware kit TR20WH remote control 1-mounting hardware bag                              |  |  |  |
| Blade Sets                                   | FP1022      | Reversible oak/walnut  |  |  |  |
| (sold separately) See catalog or www.        | FP1026      | Cherrywood   |  |  |  |
| fanimation.com for additional blade options  | FP1030      | Rosewood (glossy)  |  |  |  |

<sup>\*\*</sup>Insert Finish Codes