


Job Name:	Item Number:	
Specifier Name:	Sales Agency:	
Specifier Contact:	Agency Contact:	
Fixture Type:	Comments:	
Quantity:	Approval:	

12V LED Disk Light 3000K







D: 3" H: 5/8"

Description

Ambiance LED Disk Lighting is ideal for residential, commercial and retail applications with its ample lumen output and versatility. Ambiance LED Disks are dimmable on magnetic and electronic low voltage systems. For magnetic systems, a standard incandescent or magnetic low voltage (MLV) dimmer can be used. For electronic, an electronic low voltage (ELV) dimmer is recommended.

Specifications

1
98860SW-15
White
D: 3" H: 5/8"
36" (color/White)
Mounting Strap
Both
12V
3000°K
170
4 watts
42.5 lm/w
>85 CRI
40,000 hours to 70%
cETL Listed for Damp Locations
5-Year Limited Warranty

Instruction Sheets

• Trilingual (English, Spanish, and French) (HC-1887FS)

Available Photometry

- LM79 Photometry
- Integrating Sphere Test
- IES File

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	98860SW-15	1	785652153006	3.75	3.75	1.37	0.011	0.2	Yes
Master Pack	98860SW-15	5	10785652153003	4.25	4.25	6.25	0.065	1.4	Yes
Shipping Master		100	20785652153000	21.5	9	13.75	1.54	27.8	Yes

Photometric Diagram:

Zonal Lumen Summary

		•
Zone (Degrees)	Lumens	% of Lamp
0° – 30°	56.7	32.5%
0° – 40°	93.4	53.6%
0° – 60°	157.7	90.4%
0° – 90°	174.4	100%
90° – 180°	0	0.0%
0° – 180°	174.4	100%


Average Luminance Table (cd/m²)

Horizontal Angle (Degrees)

Vertical Angle (Degrees)

		0°	45°	90°	
	0°	60540	60540	60540	
	45°	58070	58070	58070	
	55°	48620	48620	48620	
	65°	32180	32180	32180	
	75°	1326	1326	1326	
	85°	0	0	0	

Polar Candela Chart

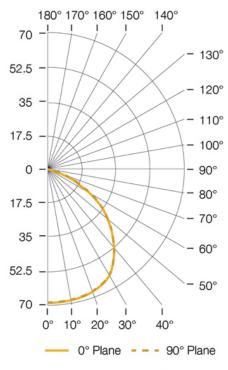

Photometry based on (1) 98860SW(-xx) LED Disk in 3000°K CCT.

Component Diagram:



STEP 1

Choose LED Disks Select number of disks, housing color and color temperature needed for your project.



STEP 2

Select Connectors & Accessories Order connection hubs, additional connector cords, extra cord mounting clips, wiring compartments and fused plugs needed for your installation. (Each disk includes a 36" linking cable.)



STEP 3

Select Transformers
Multiply the number of disks in your
system by 4 watts to determine transformer size needed. LED disks are 12V
AC for use with 12V power supplies.



7400 Linder Ave. | Skokie, Illinois 60077 | 800-347-5483 © 2013 Sea Gull Lighting LLC, a Generation Brands Company.