


Job Name:	Item Number:	
Specifier Name:	Sales Agency:	
Specifier Contact:	Agency Contact:	
Fixture Type:	Comments:	
Quantity:	Approval:	

### 24V Bulk Pack (16) 1' LED Tape Strips 3000K





L: 192" W: 3/8" H: 1/8"

### Description

Ambiance LED Tape provides ultra-low profile LED linear lighting that can be mounted securely in numerous applications with its high-endurance 3M™ adhesive backing. Ambiance LED Tape is dimmable on magnetic and electronic low voltage systems. For magnetic systems, a standard incandescent or magnetic low voltage (MLV) dimmer can be used. For electronic, an electronic low voltage (ELV) dimmer is recommended.

#### **Specifications**

Item Number	98614SW-12	
Finish	Black	
Dimensions	L: 192" W: 3/8" H: 1/8"	
Voltage	24V	
Color Temperature	3000°K	
Lumens	2,400	
Watts Consumed	48 watts	
Efficacy	50.0 lm/w	
Color Rendering	>85 CRI	
Rated Average Life	50,000 hours to 70%	
Safety Listing	cETL Listed for Damp Locations	
Warranty	5-Year Limited Warranty	

### **Instruction Sheets**

• Trilingual (English, Spanish, and French) (HC-1894FS)

### **Available Photometry**

- LM79 Photometry
- Integrating Sphere Test
- IES File

## **Shipping Information:**

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	UPS Ship
Individual	98614SW-12	1	785652158711	14.25	6	1.58	0.078	1.2	Yes
Master Pack	98614SW-12	5	10785652158718	14.5	8.75	6.25	0.459	6.5	Yes
Shipping Master	98614SW-12	60	20785652158715	39.38	18	18.78	7.704	81.9	Yes

### **Photometric Diagram:**

## Zonal Lumen Summary

Zone (Degrees)	Lumens	% of Lamp		
0° – 30°	40.8	26.0%		
0° – 40°	67.1	42.8%		
0° – 60°	119.8	76.5%		
0° – 90°	155.8	99.5%		
90° – 180°	0.8	0.5%		
0° – 180°	156.6	100%		


# Average Luminance Table (cd/m²)

## Horizontal Angle (Degrees)

Vertical Angle (Degrees)

		0°	45°	90°
	0°	18280	18280	18280
	45°	13670	14340	17120
	55°	12390	13020	16220
	65°	10670	11150	14650
	75°	8254	8326	11460
	85°	5027	4321	2737

### Polar Candela Chart

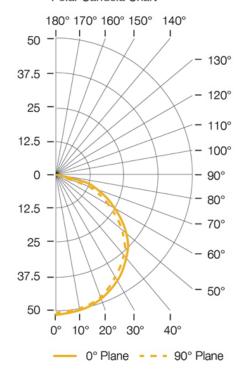

Photometry based on (1) 98606SW(-xx) 1' length 12V LED Tape section in 3000°K.

## Component Diagram:



# STEP 1

Choose LED Tape Strips Select tape length, voltage, color temperature and face color based on your desired specifications.



# STEP 2

Select Connectors & Cables
Determine required connectors and cuts
to achieve your system configuration.



# STEP 3

Select Transformers
Multiply the number of feet in your run
by 3 watts to determine transformer
size. Match voltage of the transformer
to your LED tape's voltage.



Optional Components
Mount tape with included
3M™ industrial adhesive
backing or mounting clips.



7400 Linder Ave. | Skokie, Illinois 60077 | 800-347-5483 © 2013 Sea Gull Lighting LLC, a Generation Brands Company.